

Research and Development

Final Project Report

(Not to be used for LINK projects)

Two hard copies of this form should be returned to:
 Research Policy and International Division, Final Reports Unit
 DEFRA, Area 301
 Cromwell House, Dean Stanley Street, London, SW1P 3JH.
 An electronic version should be e-mailed to resreports@defra.gsi.gov.uk

Project title	Flood Warning Dissemination Demonstration System (Phase 2)		
DEFRA project code	FD 2209		
Contractor organisation and location	QinetiQ Ltd Malvern Technology Centre St Andrews Road Malvern Worcs WR14 3PS		
Total DEFRA project costs	£ 49,741		
Project start date	18/08/03	Project end date	15/06/2004

Executive summary (maximum 2 sides A4)

The T15 approach should have a positive impact on a community's response to flood alerts as well as improving the warning service in all areas in comparison to the Automated Voice Messaging (AVM) system. The demonstration showed the approach is practicable.

A summary of the advantages include:

- Pervasive alerting with multiple presentation device types,
- Low running costs compared to AVM etc.,
- Dissemination rate would be close to that of purely broadcast systems,
- Digital messaging to allow any content,
- Message targeting could be multicast and/or unicast,
- Messages could contain highly localised information such as who in your street has spare sand bags/needs help etc.,
- Receipting to include assistance requests and offers of assistance,
- Receipting information would be available per individual,
- Receipting delivered as summaries reducing incoming message tally to EA, and

- Improved scalability
- Improved utilisation of future increase in the abundance of communication channels

Those familiar to T15 should note the last two points are new additions.

The demonstration system showed how a self organised community based response is made feasible by:

- two-way communications being put in place
 - an instant messaging chat facility
 - the flood warden can also send messages to all the devices - multicast messaging
 - the warden having summary lists of those who have acknowledged warnings, those who have asked for assistance and those who have not yet responded
 - A number of specific application types for aiding community response have also been identified.

In order to properly facilitate this, the project defined a process for warning and a supporting software framework was put in place.

Scientific report (maximum 20 sides A4)

1 INTRODUCTION

1.1 Purpose

This document is a deliverable output of the Environment Agency (EA) T15 project phase two. This single publication is the “Final Technical Report” as agreed with the EA.

This document details the findings of the community centric flood warning and response system conceived and demonstrated under the T15 flood warning research program. It is intended to have two main functions: as a project summary and to provide conclusions and recommendations for future direction. The direction sought is to improve the identified areas of warning services at best value to the EA and to make best use of future developments.

This document draws on text and diagrams from previous deliverable documents of the T15 projects as it is anticipated that this document will be most useful if it can be read in isolation.

1.2 Scope

An average of €1.2 billion of damage is done each year to some of the 1.9M households at risk from flooding. Targets have been set from central government to reduce the amount of damage caused by flooding. As well as investing in defences, public education and forecasting etc. a cost-effective way of reducing the damage could be to better inform the public; allowing them to respond accordingly.

The EA is the lead organisation for warning the British public in regard to flooding.

The warning process can be simplified as follows.




Figure 1-1 Simplified Warning Process

Any requirement of the final system or a channel trial system should be traceable to the need to inform the public (or other organisations entrusted with their welfare) in order that they can take any necessary actions.

1.3 Approach to Work Package 4

The T15 program has had three previous work packages: WP1 – Technology Comparison, WP2 – Requirements Analysis, WP3 – International Perspective.

The approach taken to achieve the purpose follows these steps:

- Bring together the channel applicability matrix from, with the aspects of service and requirements in light of international developments.
- Exploit the advantages of heterogeneous channels
- Exploit advantages of hierarchical channels
- Attempt to address the above with a desire to push the effect of the employed channels so they can positively impact on communities’ responses to flood alerts.

1.4 Document Structure

Section 2: Project Summary:

- This section gives a brief synopsis of the T15 project, its findings and impact.

Section 3: Single Channel Trial Options:

- This section details how the T15 program could be taken forward by testing communication channels separately as originally intended. Then each channel identified in other_doc was addressed for suitability for trials in dialogue with the EA.

Section 4: Proposed Demonstration System:

- This section provides the rationale and details of a cutting edge heterogeneous, hierarchical demonstration system, with self-aware community networks.

2 MOTIVATION FOR T15 - FD2209

2.1 Introduction

This section gives a brief synopsis of the T15 project, its findings and impact.

Please refer to the glossary to ensure you are familiar with all of the terms.

2.2 WP1 Modelling Synopsis

The points found to be most salient from WP1 were the communication models, the recipient scenarios and the matrix of applicability.

2.2.1 SMCR Communication Model

The most common model for communications is information theory developed by Shannon and Weaver (1949). This model recognises four elements: a **Sender**, who passes a **Message**, through a **Channel**, to a **Receiver**. Those developing technology (e.g. telephony and computer systems) as well as those involved in communication process engineering/management have successfully used this SMCR model.

The simple approach has been adopted as the main means by which communication ideas were presented diagrammatically in the T15 deliverables.

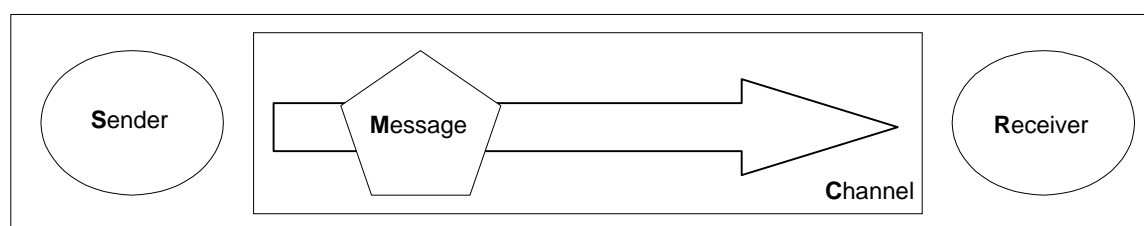


Figure 2-1 The SMRC communication model

2.2.2 Weaknesses of the SMCR model

WP1 identified that although SMCR is simple and easily understood, by itself it does not address all the relevant issues. SMCR leads analysts to assume that the sender and receiver are roughly similar. This leads to an over optimistic view that the recipient will understand the message in the way the sender intended more often than will actually be the case.

The meaning of the message is lost if there is insufficient common understanding between these parties. When the recipient and sender are computer systems for example, such problems should be both easy to discover and address. However, when the recipient and sender are human, receipt of the message alone does not mean that transfer of understanding has occurred, only that a message has been delivered.

The successful transfer of meaning is usually undertaken to have effect on the recipient. This is certainly the case for flood warning, i.e. to take appropriate action for the threat (e.g. protect dwelling, evacuate etc.).

So, how risk is communicated in flood warning can be as least as important as whether communication takes place at all. Weaknesses can be found and resolved using the constructivist model.

2.2.3 Constructivist model

Unlike the SMCR model, the constructivist model (Bennett 1987) takes into account differences between parties. It seeks to find the differences in understanding between the parties, to empathise with both of them, and to evaluate whether the communication is fit for purpose from both viewpoints.

However, given the large matrix of senders, recipients, channels and message types dealt with, it is beyond the scope of T15 to perform constructivist analysis. QinetiQ recommends that a future research direction for flood warning could be risk communication, especially in respect to communities with large mixes of cultures and language.

2.2.4 Communication relationships

Messages have two levels, the explicit and the implicit (Bateson 1979). The explicit is the content, the 'actual' message. The implicit is related to who the sender is and the relationship between the sender and the recipient. The implicit level greatly effects the interpretation of the explicit level.

In the context of flood warning dissemination this means that channels (or the messages themselves) should make apparent who the sender is, that the communication has a foundation that is credible to the audience and that credibility is always maintained. In particular, communication should be as timely, precise and accurate as possible.

2.2.5 Risk communication

At its most basic, risk communication is the communication of the probability and impact of a possible event.

The implication of sections 2.2.5 to 2.2.13 is that risk communications play a major part of the success of flood warning dissemination, as it will greatly shape the audience response.

Examples of different approaches for describing risk in terms of probability are "One in a hundred years", "One per cent chance this year" and "Will probably occur in your lifetime".

Risk communication is applicable before an event as part of public education; this could be thought of as risk preparation or reduction. It could also be applicable during an event if message content was expressed as a risk. In doing so the maintenance of credibility can be achieved more easily e.g. warning of the *possibility* of further rise or inundation.

Risk communication can also be visual. For example in some states in Australia rings are placed on telephone poles at the high points of previous floods.

In the recommendations section it is noted that multimedia presentation may offer new opportunities and could be the subject of new research.

2.2.6 WP1 Scenarios

The different circumstances under which warnings will be disseminated was the second step in the production of WP1.

It should be noted that the scenarios have some overlap. For example, a portion of the audience may be travelling on foot during a catastrophic event. Also, some channels are suitable for many scenarios and others are only really applicable to one or two (see the matrix of applicability).

The scenarios were well received by the EA and by the National Steering Committee for Warning and informing the Public (NSC WIP) as a framework in which channels can be viewed. All of the scenarios except G, inter-organisation warnings, have been adopted by the Cabinet Offices' Civil Contingencies Secretariat.

2.2.7 Scenario A: Catastrophic event with short lead time

This was included as a worst case, it stresses the message delivery rate limitations of communication channels. It, therefore, favours broadcast channels.

A high impact, low probability event affecting many people, is most likely in an urban area. The implications of covering a wider geographical and rural area could also be considered.

A large body of evidence (e.g. Drabek 1986) shows that panic often portrayed in disaster movies is mythical. In general, the more at danger a group of people believe they are in, the more altruistic they become. So rapid, clear warning of impending peril should trigger useful response not adverse reactions; the fear of panic should not stop operators from issuing such warnings.

2.2.8 Scenario B: Travelling user on foot – warning of current location

This was included to show the weaknesses of technologies that favour static recipients and may have poor propagation to mobile audiences.

2.2.9 Scenario C: Travelling user in vehicle – warning of current location

This was included to show the weaknesses of technologies that may cause unsafe distractions and may not apply to audience members of scenario C.

2.2.10 Scenario D: Travelling user remote location

This scenario covers those who wish to know of flooding in a particular place regardless of their location.

Certain cases have been identified to justify the inclusion of this scenario:

- Flooding on highways, route planning.
- Help someone else, especially those vulnerable or interdependent.
- Protect property while absent (at work or a holiday home, for example).

These personal circumstances will lead to different preferred channels, for example some may prefer an e-mail alert while others may have no access to such communication.

2.2.11 Scenario E: Static person in own dwelling

The most commonly regarded scenario is that of people in their homes. It is a crucial focus to address this scenario as it is stipulated as a target for improvement by central government.

2.2.12 Scenario F: Static person at place of work

A fair proportion of many people's lives is spent at work. A mix of technologies to satisfy the other scenarios may address the needs of those at work, especially scenario E.

However, the fact that those at work are a special circumstance and the need to know about flooding whilst at work and at home justifies their inclusion as a specific scenario. Also, it was felt that warning could be implemented by extended work place health and safety guidelines.

2.2.13 Scenario G: Inter-organisation warnings

The need for inter-organisational warnings is understood. However, to do each inter-organisational link justice would require a study of similar (if not greater) size to T15 as a whole. This is compounded, as each organisation will have different structure and different requirements such as content and presentation of information.

The Multi-Media Warning Dissemination System (MMFWDS) could explore this scenario in more depth.

2.3 WP1 Matrix of Applicability

2.3.1 Candidate Technologies

A simple means was sought to show which channels are appropriate to which scenarios. A matrix of applicability was produced to fulfil this. Channels included in the matrix are existing and possible technologies. Full analysis of these can be found in other_doc. Those technologies not included in the matrix but worthy of technology tracking are also explained in other_doc.

Technologies already in use by EA analysed in WP1 were:

- Automatic Voice Messaging
- Loud hailers
- Sirens
- FAX
- Conventional Broadcast Media
- Flood Wardens – door knocking
- Internet – pull
- Teletext
- Special Signage

Technologies thought to be of possible use for warning by EA were:

- Simple Messaging Service Text messaging
- SMS
- Wireless Application Protocol pull
- E-mail
- Internet – pushes
- Advanced Signage
- Tickers on standard TV
- Digital TV
- RDS Radio Data System Program Type 31
- Radio Data System Emergency Warning System
- Digital Audio Broadcast
- Power Line Communications

More advanced technologies on the horizon that may be of use by EA were:

- Fire alarm look alike concept
- SMS Cell Broadcast
- 3G and 4G mobile phones
- Ad hoc networks
- Bluetooth, ZigBee & Other Wireless Protocols
- Light
- Ultra wide band
- Software Defined Radio
- SMS Cell Broadcast

The matrix addresses the public's needs: the possible nature of presentation of flood warning messages in the identified scenarios.

A mix of technologies should be sought for the reasons stipulated in 4.1.1. The final work package should consider gaining the maximum audience for the minimum cost. This will have to include checking the

scenarios served for given selections. The figure below shows which technologies could be applicable against each scenario; these will be ranked in a later revision.

	Automatic Voice Messaging	Loudhailer	Siren	Fax	Door to Door	Conventional Broadcast Media	Special Signage	Internet Pull	RDS Program Type 31	RDS Emergency Warning System	Digital Audio Broadcast	SMS (Mobile Text Messaging)	SMS Cell Broadcast	WAP Protocol Pull	E-Mail	Internet Push	Digital Interactive TV	Power Line Communications
Scenario A Catastrophic Event			☰			☰			☰	☰		☰	☰					☰
Scenario B User on Foot		☰	☰				☰				?	☰	☰	☰				
Scenario C User in Vehicle		?	?			☰	?		☰		☰	☰	☰	☰				
Scenario D Travelling User (Remote)								☰				☰		☰	☰	☰		
Scenario E User at Home	☰	☰	☰	?	☰	☰		☰	☰	☰	☰	☰	☰	☰	☰	☰	☰	☰
Scenario F User at Work		☰	☰	☰				☰		?	?	☰	☰	☰	☰	☰		
Scenario G Inter-Organisation				☰				☰		?	?				☰	☰		

Figure 2-2 Matrix of applicability

Scenario A - *Catastrophic event with short lead time* is likely to be costly and/or have limited coverage if using traditional means alone (e.g. siren). More economic means could give coverage to most people to a suitable level of satisfaction. The final analysis document will address this issue.

There is an obvious advantage to certain mobile technologies such as SMS cell broadcast, which could also address Scenario B: *Travelling user on foot, warning of current location*, too.

The selection of some technologies can have multiple benefits. For example, with RDS, which gives a uniquely strong coverage for Scenario C: *Travelling in vehicle*, but can also address Scenario E: those at home.

Scenario D: *Travelling user remote location* brings special concerns and demands very fine targeting. This is likely to favour SMS and e-mail in particular.

Scenario F: *Static person at place of work* may be able to be addressed via HSE legislation and risk assessing.

Scenario G: *Inter-organisation warning* should be able to be addressed by a two stage approach. Firstly, selecting a coverall channel (e.g. Internet Push/Pull) and secondly by developing applications that utilise this channel but have specific presentation.

2.4 WP1 Protocols

Two particularly important protocols were identified:

- Common Alert Protocol (CAP)
- Tpeg Environmental Information and Alerts (EIA)
- Geographic Mark-up Language (GML)

CAP is developed by the Public Partnership for Warning (PPW) it has been accepted by Oasis as a draft proposal and is expected to become a W3C standard. After dialog with QinetiQ and the CAP workgroup, CAP now has improved GML support.

Tpeg EIA has binary and XML flavours, is supported by the European Broadcasting Union and has been considered for EC standardisation. Although its geospatial elements are more primitive than CAP's, it has a distinct advantage that the related Tpeg standards are already being realised in commercial products.

2.5 WP1 Conclusions & Recommendations

Heterogeneous systems are desirable for the following reasons:

- Increased flexibility, EA would have more channels with different properties to choose from
- Increased robustness as more redundancy would be built into the system
- Increased effectiveness as research shows that recipients typically seek confirmation with secondary channels
- Increased choice for recipients

A heterogeneous system can be shown with an adapted SMCR diagram:

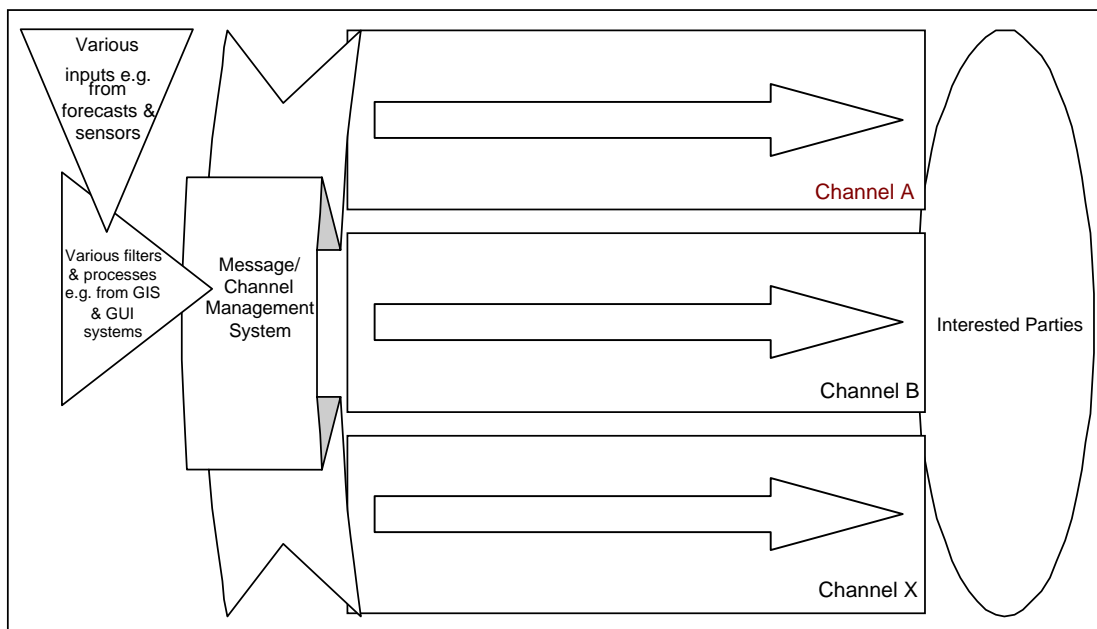


Figure 2-3 SMCR heterogeneous system

Hierarchical systems are recommended because by layering communication channels, a new 'virtual' channel can be conceived that has otherwise impossible characteristics. For example by having a broadcast first leg and an unicast second leg the system can have speed close to that of a broadcast system but also have receiving facilitated.

Layering of communication channels can be arranged so that from the recipients viewpoint they are in direct contact with the sender and have properties not possible without layering.

A hierarchical system can be shown with an adapted SMCR diagram:

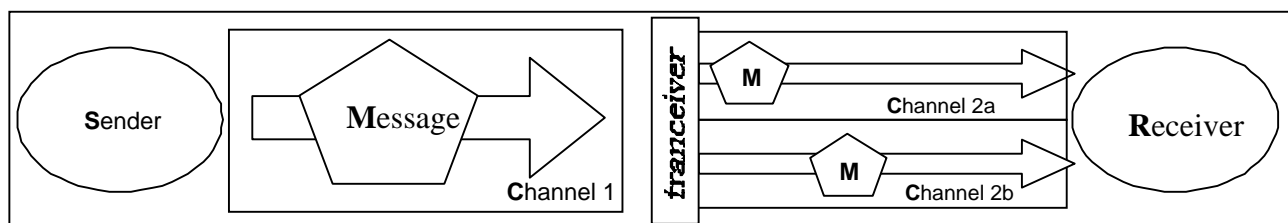


Figure 2-4 SMCR hierarchical system

2.6 WP2 – Requirements’ SMCR models

The boundaries of scope and responsibilities of the T15 and MMWDS need to be fully understood and agreed upon. The full treatment of requirements for the system will be provided by the MMWDS project.

All requirements for actual warning services must be traceable back to the publics’ need to take action or to have action taken on their behalf. Requirements for trial systems should focus on determining on how channels can contribute to actual warning services; i.e. the trial systems will not necessarily have all the requirements of actual systems. Also trial systems may have extra requirements and details on what information is required from the trial.

Full treatment of requirements for any particular trial system will be undertaken as part of the development of that system.

How trial systems differ from actual systems was explored in the WP2 SMCR diagram below.

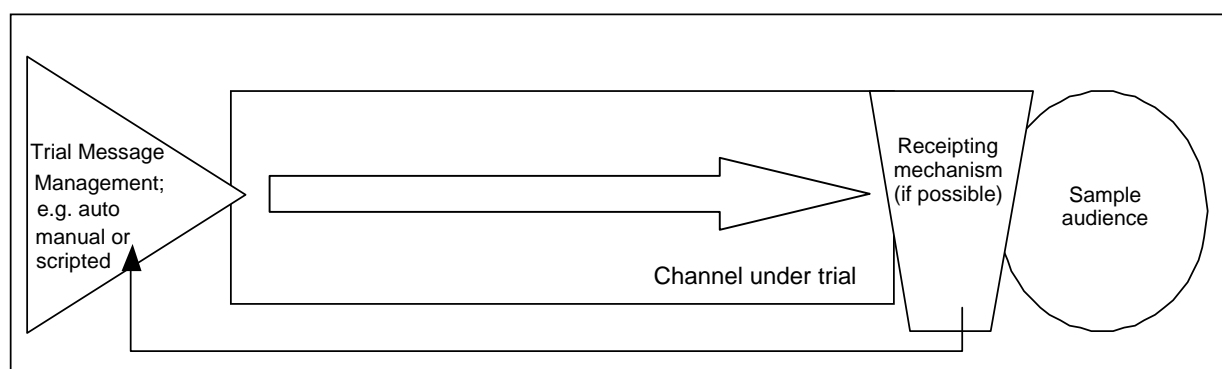


Figure 2-5 A view of a general channel trial system

2.7 WP2 - Identified users

The following types of stakeholders were identified for flood warning trial systems:

2.7.1 EA System Administrators

Administration duties concern how channels can be configured: parameters, thresholds, and operator permissions etc. The nature of requirements pertaining to administrators will be important to both actual and trial systems but will largely depend on the capabilities of the channels in question.

2.7.2 EA System Operators

EA system operators are responsible for the dispatching of warnings to the public. Their roles are likely to change as the MMWDS is introduced, used and better understood.

The requirements imposed by these users are based on these roles and may also change; but will remain related to the control of message dispatch.

For some trials it could be acceptable to send messages automatically reducing the cost. The use of real sensor/forecast data could be avoided to reduce costs further; e.g. a script could control the dispatch of warnings.

Where no EA System Operator users are involved in the running of trials, their needs and impact will still need to be assessed to judge the suitability of particular communication channels and systems using them.

2.7.3 Message Recipients

The following WP2 diagram shows how individual channels used by the MMWDS can be modelled from the recipients perspective. It is of the heterogeneous approach recommended in T15-WP1, here the different channels are also likely to be of different nature so they can be optimised for purpose (e.g. a siren for alerting and a free phone help line for informing).

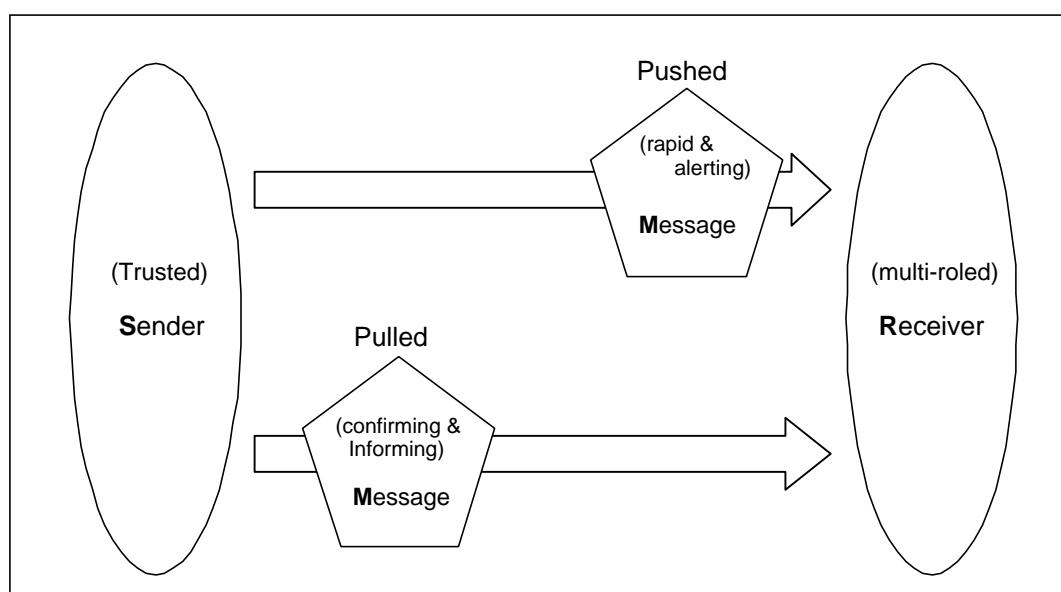


Figure 2-6 Ideal SMRC model (end recipients view)

The channels have been intentionally omitted from this diagram. Strictly speaking the recipient does not require the channels, only the messages they bear. 'Channels' are such an obvious part of any infrastructure that it is fair to consider them in requirements analysis. By including channels, useful requirements related to channel rather than the message can also be alluded to.

The public recipient end user type is very complex and can be broken down in many ways. These include, but are not limited to, by scenario, by geographic and demographic constraints.

Trials could be concerned with many aspects of warning, such as improving message content, presentation and delivery targeting. Even if a trial is primarily concerned with the technical communications aspects of a channel, it should seek to determine as precisely as possible the audience reached; not just in numbers but also the nature of those people reached.

Sometimes this may be a prime purpose of a trial: to determine how audience coverage could be expanded. When the results of several trials are combined, an understanding of who is covered by which channels will be possible.

2.7.4 Trial Stakeholders

Members of the T15 project board and panel are users of trial systems in the sense that they need to be confident in the trial system and its conclusions. Related projects will have an interest, in particular the MMWDS; and professional partners such as the Met Office may also use information learned.

When considering the total coverage of the audience, time and care should be spent ensuring how overlapping of possible channels best serves the public need with best value. This will be the main thrust of the last work package of T15's report "D5, Final Analysis" which pre-empted how to achieve best value coverage.

2.8 WP2 - Requirement Categorisation

The EA tend to view requirements and problem areas in the following categories

- Service Coverage
- Support
- Special Devices
- Recipient Costs
- Registration and Database Systems
- Recipient Preference Requirements
- Delivery Reporting and Management

2.8.1 Audience Coverage

It is unrealistic to expect to approach 100% coverage. A simple percentage can measure those members of the UK at risk who are covered but such a number would be misleading unless it takes into account the different sub-groups of recipients, the scenarios they are likely to be in, and whether they are matched by at least one, preferably two channels of dissemination.

Coverage can be expected to increase in the long term assuming the promises of "pervasive" or "ubiquitous" computing are realised and gradually adopted into society. In these visions consumers are able to use services from any provider, with any device, and through any communication channel available in a world where computers and communication channels are "everywhere" (e.g. part of all their electronics goods in a "networked home" and even in people's clothing as "wearable computers").

2.8.2 Targeting

This aspect is in regards to the proportion of people receiving warnings that actually required warning. For example a television broadcast is bound to reach audience members who are not affected and do not require any warning. This aspect could be measured as a percentage; based on a ratio of those who received a *required* warning and of those who received an *unnecessary* warning.

Many technologies make the request for messaging easy for some recipients, providing very fine grain, controllable targeting. These are especially useful for modern unicast (or multi-unicast) messaging services such as e-mail and SMS, This is termed a user-triggered push in the T15 project.

Such unicast signalling is also possible in a broadcast channel. Some receivers can be configured to ignore most messages and only present those that are relevant to the recipient. This can be thought of as a multi-tier system where the processor is acting as a channel, filtering the broadcast communications and converting them into what is unicast from the recipient's perspective. Where recipients can be individually identified by those dispatching messages (e.g. by postcode / house number or an arbitrary system) the messaging can be perceived as unicast from the sender's perspective too; messages can be sent knowing they will be received by a single recipient.

Multi-cast messaging is coarser grained than unicast. Instead of per recipient it can be thought of as per sub-group. This could be done geographically for example and one message sent to a whole street. This is equally possible in a broadcast channel and should increase the message throughput capability in comparison to unicast in direct proportionality to the size of the groupings (10 recipients per group == 10x throughput).

2.8.3 Speed

This aspect is simply the measured rate of warning delivery. Ideally it would include only properly targeted (see above) messages and measurements.

From the recipient's perspective, messages need to happen at least before it is too late to respond. It is assumed that the only reason a warning could be too early is if forecasts have changed and new messages are then made necessary. It is assumed that this is dealt with elsewhere i.e. in forecasting systems so the certainty is measured against the impact of the event and the necessary lead-time for any response. The levels of warning could also be used to address this issue. If certainty of forecast is not sufficient or that the period is large, watches can be issued rather than warnings or alerts.

The mode of communication will be a prime deciding factor in the speed of delivery of the message where, in general, broadcast systems may be favoured.

2.8.4 Cost

The costs of all interested parties should be minimised as much as possible. Any costs to recipients may deter message reception, which needs to be avoided. Ideally, there would not be any tariff to the recipient associated with the reception of a warning. It is believed that ongoing costs such as a being charged monthly, or on a per message basis, would be less acceptable than a small one-off charge. An initial charge could be offset against cheaper household insurance for example.

Costs to the EA need to be easily controlled and be understood in terms of the QoS provided i.e. the value returned. One way to help control costs is to educate the public to expect only one pushed message and then to use broadcast pull methods for confirmation purposes; push channels can be particularly expensive to communicate across.

Where multiple push channels are required, receipts could be used so that, in the event of delivery failure, further channels/messages can be sent intelligently, using the channel redundancy.

This aspect could be measured as the cost per message, the cost per recipient or the mean total cost per incident. Costs should be identified for all interested parties. Cost may vary with the size of audience for any incident. It would require full messaging simulation to understand the costs per flood event, per sub group, per scenario, per channel; in particular, intelligently managing multiple push channels as mentioned in the paragraph above.

2.8.5 Content

Many channels have no choice of content type. AVM for example can only convey audio (voice) messages. Channels that are essentially digital data links typically can carry any digital data, such as encoded voice, video etc.

Such content rich methods of delivery can sometimes be further enhanced by the use of presentation devices that are flexible and configurable by the recipient. For example Tpeg-EIA systems can display messages in any language regardless of that of the originator.

A subjective scale is probably the most meaningful measure for this aspect. For certain scenarios and/or audience sub-groups, it may be possible to define more objective scales than would be possible for one that attempted to cover all.

Separation of the content and presentation can be ambiguous if not properly addressed.

2.8.6 Presentation

This mainly covers recipient interpretation, suitability to particular scenarios and audience sub-groups. Determination and measurement of this aspect will often rely on feedback (e.g. by questionnaire or interview).

A simple set of categories and heuristics is probably the most meaningful measure for this aspect. For certain scenarios and/or audience sub-groups, it may be possible to define objective scales.

Spatial models of perception should be considered for the exact nature of the presentation of messages. The audience's focus is considered to determine how likely they are to notice the information that is competing for attention with information from other sources. Though this is usually simple common sense, the application of the model can verify the legitimacy of the presentation used (Cheverst et al 2001). These parts of the presentation aspect may have their own measures if deemed necessary.

2.8.7 Receipting

Receipting has several uses:

- Determining QoS as some measure of audience coverage and message reception rate.
- Multiple push channel management.
- Targeting door knocking to those who have not yet received a message (can be thought of as a form of the above point).

Per-recipient receipting may not be practical or cost effective for large-scale dissemination or for particular channels. For example, if receipts were being delivered over a data link they would decrease available bandwidth and could complicate management systems. If Per-recipient receipting is not undertaken for a particular channel, samples could be used to determine rate of successful delivery for QoS measurements.

Receipting mechanisms for partner organisations (e.g. the emergency services or BBC) is crucial to operations. The impact of non-communication with such organisations will be far greater than that of not informing any one particular member of the public.

A measure for receipting aspect could be borne from the cost per 1000 messages receipted and also a measure of certainty (e.g. if samples are used). The actual level of *reception* itself is dealt with in the "Coverage" aspect above.

2.9 WP3 – International Perspective

WP3 reviewed the systems in Australia, Austria, Canada, Denmark, Finland, Japan, The Netherlands, Norway, Sweden, Switzerland and finally the United States of America.

Of particular interest was the use of RDS PYT31 in countries such as Norway and the hierarchical and extensive infrastructure employed in the US' Emergency Alerting system.

International alerting efforts were also presented. The Global Disaster Information Network (GDIN) was proposed as part of vice-president Gore's initiatives. It seeks to provide an integrated solution that would allow international warnings to be broadcast and to also enrich the constituent existing systems.

The money was solely American and the GDIN was affiliated with other American initiatives such as the Partnership for Public Warning (PPW). This would indicate that the GDIN line would closely follow the PPW ideals and proposed standards such as the Common Alerting Protocol (CAP). Some members have shared appointments with GDIN and PPW; these would be ideal candidates for the NSC WIP to target for dialog.

Since the publication of WP3, GDIN activity has picked up

3 SINGLE CHANNEL TRIAL OPTIONS

3.1 Introduction

This section describes how the decisions were made on taking the T15 project forward through consideration of testing communication channels separately as originally intended and through dialogue with the EA.

3.2 Original Options

At the outset of T15 it was imagined that a cost benefit process would select a suitable dissemination channel.

At the program closure meeting QinetiQ and EA ran through the options for single channel trial possibilities. It was agreed that none of the options would be useful to the EA. The channels and the reason for non-trial suitability are as follows:

- **Advanced AVM-** results would be product specific. EA's existing knowledge and further international dialogue would allude to best options. Risk well understood technology that is already being integrated with the MMWDS. The cost of the telephone calls still has to be paid by the EA. This is in the region of £60k for the average flood event.
- **Special Signage** – already being developed and under trial by the EA.
- **Internet pull** – already being addressed by the EA
- **Internet push** – equipment needs to be on and connected, may be applicable when Broadband Britain comes to fruition
- **RDS** – simple audio only (albeit with very limited length text), effective, used around Europe, good adoption by manufactures. Useful to those in scenario C.
- **RDS Emergency Warning System** – More advanced and flexible than RDS. Not adopted by manufactures.
- **SMS unicast** – under trial by the Office of E-envoy.
- **SMS Cell broadcast** – useful to those with mobile phones but legal provision is still an issue.
- **DAB** – far more flexible and higher data rate than RDS.
- **Power Line Communications** – already under trial in the NE by David Hay.
- **Wireless Ad-hoc mesh networks** – could use air interfaces such as DECT and its DPRS, well adopted, inexpensive and highly capable.

3.3 Option Selection

In discussions with the EA few of the options seemed to be of interest that were not already in use or under trial elsewhere. EA decided that investment would be best placed demonstrating the hierarchical dissemination and ad-hoc community networks.

4 DEMONSTRATION SYSTEM

4.1 Introduction

This section provides some details from the heterogeneous and hierarchical demonstration system, for community centric warning and response networks.

Advantages demonstrated:

- Pervasive alerting with multiple presentation device types
- Low operational costs compared to AVM etc.
- Dissemination rate close to that of purely broadcast systems
- Digital messaging to allow any form of content
- Message targeting can be that of multicast and/or unicast
- Messages can contain highly localised information such as who in your street has spare sand bags/needs help etc.
- Receipting would be available to the EA on a per individual basis
- Receipting to include assistance requests and offers of assistance
- Receipting delivered as summaries reducing incoming message tally to EA
- Community based response made feasible through add on distributed collaboration applications
- Improved scalability
- Improved utilisation of future increase in the abundance of communication channels

The last two points are new observations to phase two and come from the deeper analysis of the problems involved and how the approach, its process and framework have been engineered to address them.

Pervious work in the T15 program identified the themes for improvement to be demonstrated to the EA. These themes are:

- Heterogeneous channels to provide resilience, flexibility and confirmation
- Hierarchical channels to provide otherwise unachievable channel properties e.g. low cost rapid delivery of broadcast systems with receipting of unicast messaging
- Enabling channels to be used in systems beyond warning and also of use in response
- Use of common and open standards
- Improving the identified seven aspects of service:
 - Audience Coverage
 - Targeting
 - Speed
 - Cost
 - Content
 - Presentation
 - Receipting

It was noted at the demonstration that the T15 system succeeds against all these criteria.

4.2 Heterogeneous and Hierarchical Approach

There can be no one magic solution. None of the technologies can address all identified scenarios. So the only way forward is to have a heterogeneous approach; one that has a mix of technologies to provide as wider audience as possible.

Furthermore, redundancy gives resilience. The more channels that exist to propagate messages, the higher the probability that the intended recipients will receive the message: even if some channels fail, others may succeed.

Research shows that members of the public who have received warnings typically seek confirmation via consistent and multiple reliable sources before taking requested action (Drabek 1986). Whichever message is received first will make the audience more receptive to following messages. This increase in receptiveness will hopefully be to the level such that the audience actively seeks confirmation messages (e.g. turns on a radio).

If only one message is received, or if messages are received via only one channel, there is a chance that no action will be taken by the public.

A multi-tier approach is in itself a desirable approach as it can allow the mixing of otherwise mutually exclusive properties. For example, channels that are broadcast in nature have large throughput of messages and require less precise data. Unicast channels allow finer granularity of targeting but can require very accurate data that may not be available.

By choosing the correct channels for each tier, characteristics that would be difficult to achieve can be more easily tailored.

4.3 Demonstration Aim

To establish an greatly improved approach for the dissemination of flood warnings, reducing the cost of disseminating warnings, improving the resilience of the system, its message targeting, its message delivery speed and making the service far more inclusive than the current service (e.g. catering for all languages and for specific needs). To develop a system that meets this approach, by integrating several communication channels and different types of presentation device. This system will allow demonstration of the approach and evaluate the effectiveness of the chosen presentation devices. To show how the same infrastructure, when in place, could allow co-ordinated community reaction to flooding incidents.

4.4 Demonstration Architecture

The system was designed to be hierarchical having two primary legs

- DAB carousel for Tpeg alerts
- Internet push – in case of demonstration area with poor DAB coverage; also supporting CAP alerts

However due to difficulties including broadcasting arrangements with the BBC the DAB reception code was dropped from the development part way through.

The secondary leg is a wirelesses ad-hoc network being able to ingrate a number of presentation devices including:

- Simple alarm metaphors such as a vibrating pillow
- Common household devices such as fire alarms
- Common workplace devices such as burglar alarms
- Nomadic devices that could be useful to scenario C
- Complex display devices such as Digital Personnel Assistants

A possible arrangement of a final system is shown in the diagram below:

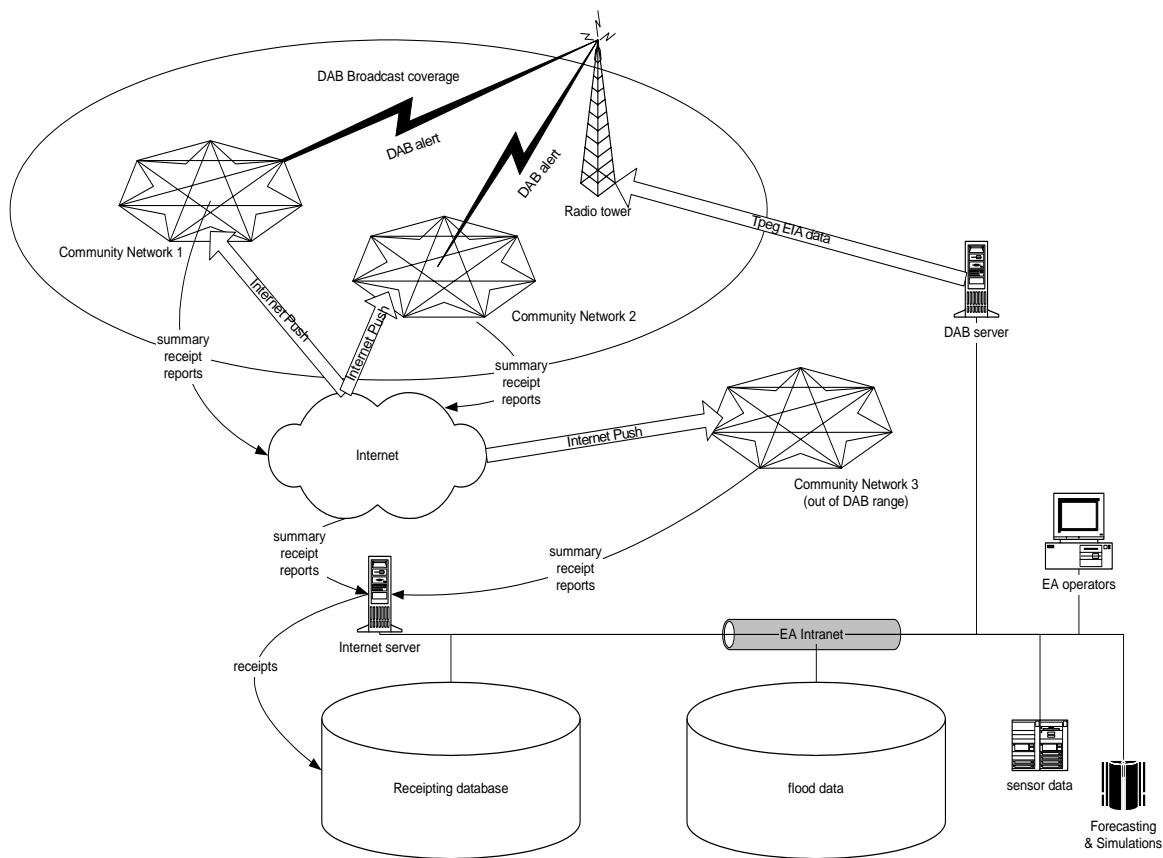


Figure 4-1 Demonstration System Architecture

For demonstration purposes, tying in systems such as the forecasting and sensor data would be unnecessary. Ideally the broadcast would be achieved with a mixture of DAB (or similar WAN technology) and Internet push giving flexibility, redundancy and confirmation. Tpeg and CAP messages were supported so the protocols could also be tested for suitability.

Each community network could have its own unique make up of presentation devices that also serve as transceivers propagating messages far beyond the range of the device that picked up the original broadcast. An ad-hoc network was demonstrated.

It has been shown how receipts can be collected in the community network and presented to the warden ready for dispatch to the EA as a summary report.

4.5 Software Design

The system being a prototype had less quality control and as the emphasis was to prove the possibility of a hierarchical and heterogeneous approach

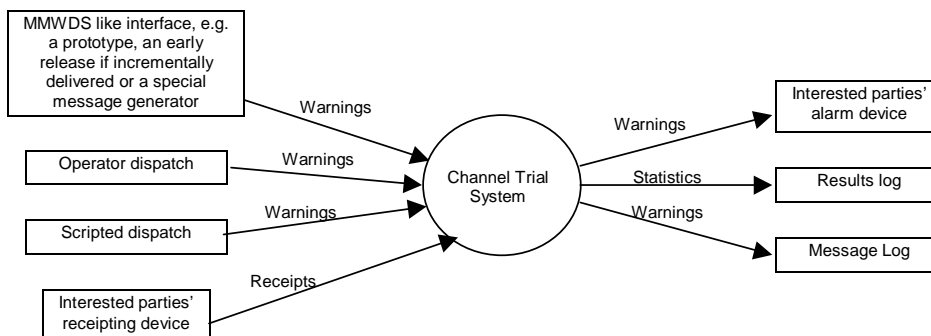


Figure 4-2 Demonstration system concept diagram

This diagram is taken from T15 - WP2 D3 requirements document. It closely matches the one used for the demonstration system except that an interface to the MMWDS was not pursued.

The software design and its implementation has been archived and is available to the EA but it should be noted that the importance was placed on demonstrability rather than reuse or maintainability which is only appropriate for a demonstration system.

4.6 Messaging Details

The demonstration system used a text and icon messaging system that covered the following levels:

- all clear
- flood watch
- flood warning
- server flood warning

The icons used were the standard EA flood watch icons.

Four receipts types were used:

- acknowledge
- request assistance
- offer assistance
- not acknowledge - no response received

The demonstration system was ad-hoc so that all the devices that could be reached were automatically included in the recipient lists, even those never encountered before. The warden has the ability to alter those in recipient list prior to initiating the dispatch process.

Messages over right preceding messages, so that a newer "flood warning" is shown and not blocked by an older unacknowledged "flood watch" for example, so the situation displayed is the most current.

4.7 Distributed Software for Community Flood Response

There are several applications that could be distributed over the community network that would enhance its use beyond warning and into the domain of response. Some of those types understood to be of importance to flood response are briefly described below.

Multicast messaging could be enhanced similar to email lists or "reflectors" for simple Command and Control applications. This would mean that those taking on particular roles in a response could be addressed by their

roles, and such lists could be dynamic. So that a message sent to "door knockers" or "sandbag shifters" gets sent to those scheduled to, or known to be currently able to, accomplish that task.

More complex command and control tools could be employed such as effects based planning tools developed for military needs.

Situational awareness tools are applications that are designed to allow a shared interpretation of events and a teams response to them, as a situation unfolds. This simple approach of allowing a common understanding and orientation to a problem can have a great affect on the achieved outcome.

Resource Management tools aim to optimise the use of limited supplies so they are employed most usefully. Candidate resources for community based flood response include humans, their effort and physical supplies such as sand bags.

Geospatial reasoning and multi-point route planning are of importance given the required rapid tempo of response; so that resource movement is achieved towards an optimum. Specialised enhancements could determine and respect the differing flooding patterns that occur for the given geography e.g. as waters retreat back after the main flooding event.

Digital proxies and movement context extraction would be possible with the use of nomadic warning devices. This could be used to enhance the above applications allowing them to use/show the current location of respondents and their previous paths.

A general observation is that whatever applications are employed they should be developed sympathetically so that they can enhance one another's operation.

5 CONCLUSIONS

The aims of the project were successfully demonstrated to the T15 project team and members of the project board. There were many interesting observations and comments that have been worked into this document.

The approach of a mix of hierarchical heterogeneous has shown to be feasible and some of the top level software design should be able to be used for further development towards a trail system. Some of the outcomes the approach (e.g. having a local list of those non-acknowledgements) have already been identified as being particularly useful (e.g. generating a list of those to warn by foot).

Each of many communities can be notified as the first leg in a hierarchical system in a matter of seconds. The rate of local dissemination depends very much on the number of transceivers in place and their networking (e.g. range, bandwidth, number of hops in a mesh etc.). In our experiments using very modestly specified equipment the dissemination time for a 12-24 units never exceeded thirty seconds. The in this way the approach is very scalable.

The use of heterogeneous presentation devices was achieved by using the vibration capability of the Cybiko units and their integration with a Yale burglar system and some domestic fire alarms. The exact nature of what kinds of presentation would be most suitable for those with particular needs would be best be considered under separate study by the EA. We understand that there has been some work conducted by the EA itself in this area and the general social implications of warning.

It was also demonstrated that the T15 approach is agnostic to any particular equipment implementations. What is important is the general approach itself and the underlying frameworks that support it. So as technology develops in these areas (e.g. 4G mobile phone technologies) new equipment should be readily embraced by any deployed systems, In fact it is hoped that wireless technologies such as the IEEE 802 specification family become domestically adopted, their will be more routes by which warnings can be delivered to their target audience.

Multiple reception channels do pose technical problems, but these can be surmounted. In a pervasive computing world, where your PC, mobile phone, T.V., ZigBee enabled refrigerator are all wireless ICT, the new problem is nuisance warning. The process T15 defined and the design of the software framework tackles this by using multiple concurrent warning sessions, each with their own target audience list. So when a recipient has acknowledged the notional correct number of warnings (e.g. two) the remainder yet to be delivered are cancelled and removed from the system. Assuming that this is scaleable, and it appears so at least to the level of several thousand recipients per community network, the future only opens more possibilities for the managed delivery of flood warnings.

From discussion with the T15 project team it is apparent that such a system would be of use to the EA to disseminate other information such as air and water quality and that such wireless technology would be useful to certain other processes undertaken by EA personnel. Also there may be community centric messages that could also be supported such as neighbourhood watch schemes. This can be looked into in any subsequent work funded under T15.

6 RECOMMENDATIONS

The primary observation made by the T15 project team is that now the concept has been validated a trial system should be developed. Ideally this would be sited close to EA facility or a flood warden's home and using a target community that is known to be committed towards self response to flooding.

Given that the EA is likely to be only one of several reception channels for alerts an effort should be made to track, and adjust to, on-going open standards alert developments. This is important so that technological developments made using standards other than Tpeg could be utilised by the EA for their own flood warning program. The Common Alerting Protocol is of particular note and has undergone its initial standardisation through the standards body OASIS.

UK Government approach to emergency management and the resultant Civil Contingencies Bill rightfully means that that responses will always be seen as multi-agency concerns. T15 has embraced this concept from its outset, through scenario G - inter organisational warning. So the messaging process resultant from T15 fits well with these requirements. The findings of any trial system should be fed into appropriate channels in this direction such as the Government Information and Communications (Ops) department at the Cabinet Office and the National Steering Committee for Warning and Informing the Public.

The Health and Safety Executive should be consulted in regards to scenario F, a user at work. Coastal flooding for example could provide justification for this where lead times may be short and the results devastating. The HSE's involvement would hopefully result in modified working practices.

Through a trade organisation the insurance industry should be consulted about the possible impact of T15 research. Both the industry and its consumers have vested interests; receipted warnings could be strategically used to improve the overall service, reduce fraudulent claims, lower premiums, increase insurability of property, and further engage the public. The alerting infrastructure itself could be facilitated with the industries involvement and provide the means for funding or subsidising the purchase domestic warning units.

Multimedia channels could support highly emotive messaging to mobilise community response this could be an interesting future research area for T15.

Sensor platforms are in place for detecting other environmental factors for example those put in place towards EU directives. These could have added value in monitoring factors that are useful to flooding detection and prediction, and could also be used for the transmission of alerts. It is imagined that the extra cost associated would be insignificant compared to the possible benefits though premise needs investigation in itself. From initial discussion with EA data monitoring researchers it should be possible to supplement local flooding information from other initiatives.

7 REFERENCES

- [1] **Bateson, G. (1979)** *Mind and Nature*, Bantam Books
- [2] **Bennett, M. (1987)** *Towards ethno relativism: a developmental model of intercultural sensitivity*, University Press of America
- [3] **Drabek, TE (1986):** *Human system responses to disaster: an inventory of sociological findings*, Springer-Verlag
- [4] **Dorfman M, et al (1999):** *Software Engineering*, IEEE Computer Society Press.
- [5] **Mazza, C et al (1994):** *Software Engineering Standards*, Prentice Hall
- [6] **Mileti, D and Sorensen, H (1990):** *Communication of Emergency Public Warnings*, Colorado State University
- [7] **Molino S. (2002):** Bells and Whistles, Belts and Braces: designing an integrated flood warning system for the Hawkesbury Nepean Valley. "Part 1 available technologies" *Journal of Emergency Management* Autumn 2002
- [8] **Pressman R, (1992):** *Software Engineering, a Practitioners Approach*, Mc GrawHill
- [9] **Shannon, C. and Weaver, W (1949)** *The Mathematical Theory of Communication*, University of Illinois
- [10] **T15-D2: Briscoombe N, (2002)** *Comparison Report Existing, Alternative and Advanced Dissemination Technologies*, QinetiQ
- [11] **T15-D3: Briscoombe N, (2002)** *Requirements Report*, QinetiQ
- [12] **T15-D4: Calladene T and Briscoombe N, (2002)** *Warning Dissemination: An International Perspective*, QinetiQ

8 BIBLIOGRAPHY

8.1 Internet links

Over five hundred web sites were used in the gathering of information, documents and opinion. Links to some of the more general ones are given below.

- <http://www.alertsystems.org> American flood warning systems.
- <http://www.bbc.co.uk/rd/> BBC Research and Development.
- <http://cindi.usgs.gov> Center for Integration of Natural Disaster Information.
- <http://www.cellbroadcastforum.org> forum for SMS Cell Broadcasts.
- <http://www.colorado.edu/hazards> academic *Disaster Research* resource that has a monthly newsletter.
- www.dartmouth.edu/artsci/geog/floods/index.htm includes a flood observatory.
- <http://www.disasterlinks.net> includes many disaster-related links.
- <http://www.edis.ca.gov> Internet push & pull of emergency warnings in California.
- <http://www.fema.gov> Federal Emergency Management Agency.
- <http://www.fhrc.mdx.ac.uk> Middlesex University's Flood Hazard Research Centre.
- <http://www.floodforum.net> hosted by the Parliamentary Office of Science and Technology.
- <http://www.hse.gov.uk/hid/land/comah/level3/5c99212.htm> relating to warning signage.
- <http://www.incident.com> hosts definition of Common Alerting Protocol.
- <http://www.nnic.noaa.gov/CENR> Committee on Environment and Natural Resources.
- <http://www.partnershipforpublicwarning.org> a Public Private Partnership for warning the public, previously headed by Peter Ward.
- <http://www.plca.net> the Power Line Communication Association.
- <http://www.ukdigitalradio.com> UK resource for DAB.
- <http://rds.org.uk> UK RDS forum.
- http://sdcd.gsfc.nasa.gov/DIV-NEWS/earth_alert.htm Earth Alert project.
- <http://www.wdc.ndin.net> The Western Disaster Center.
- <http://www.worlddab.org> Digital Audio Broadcast resource.